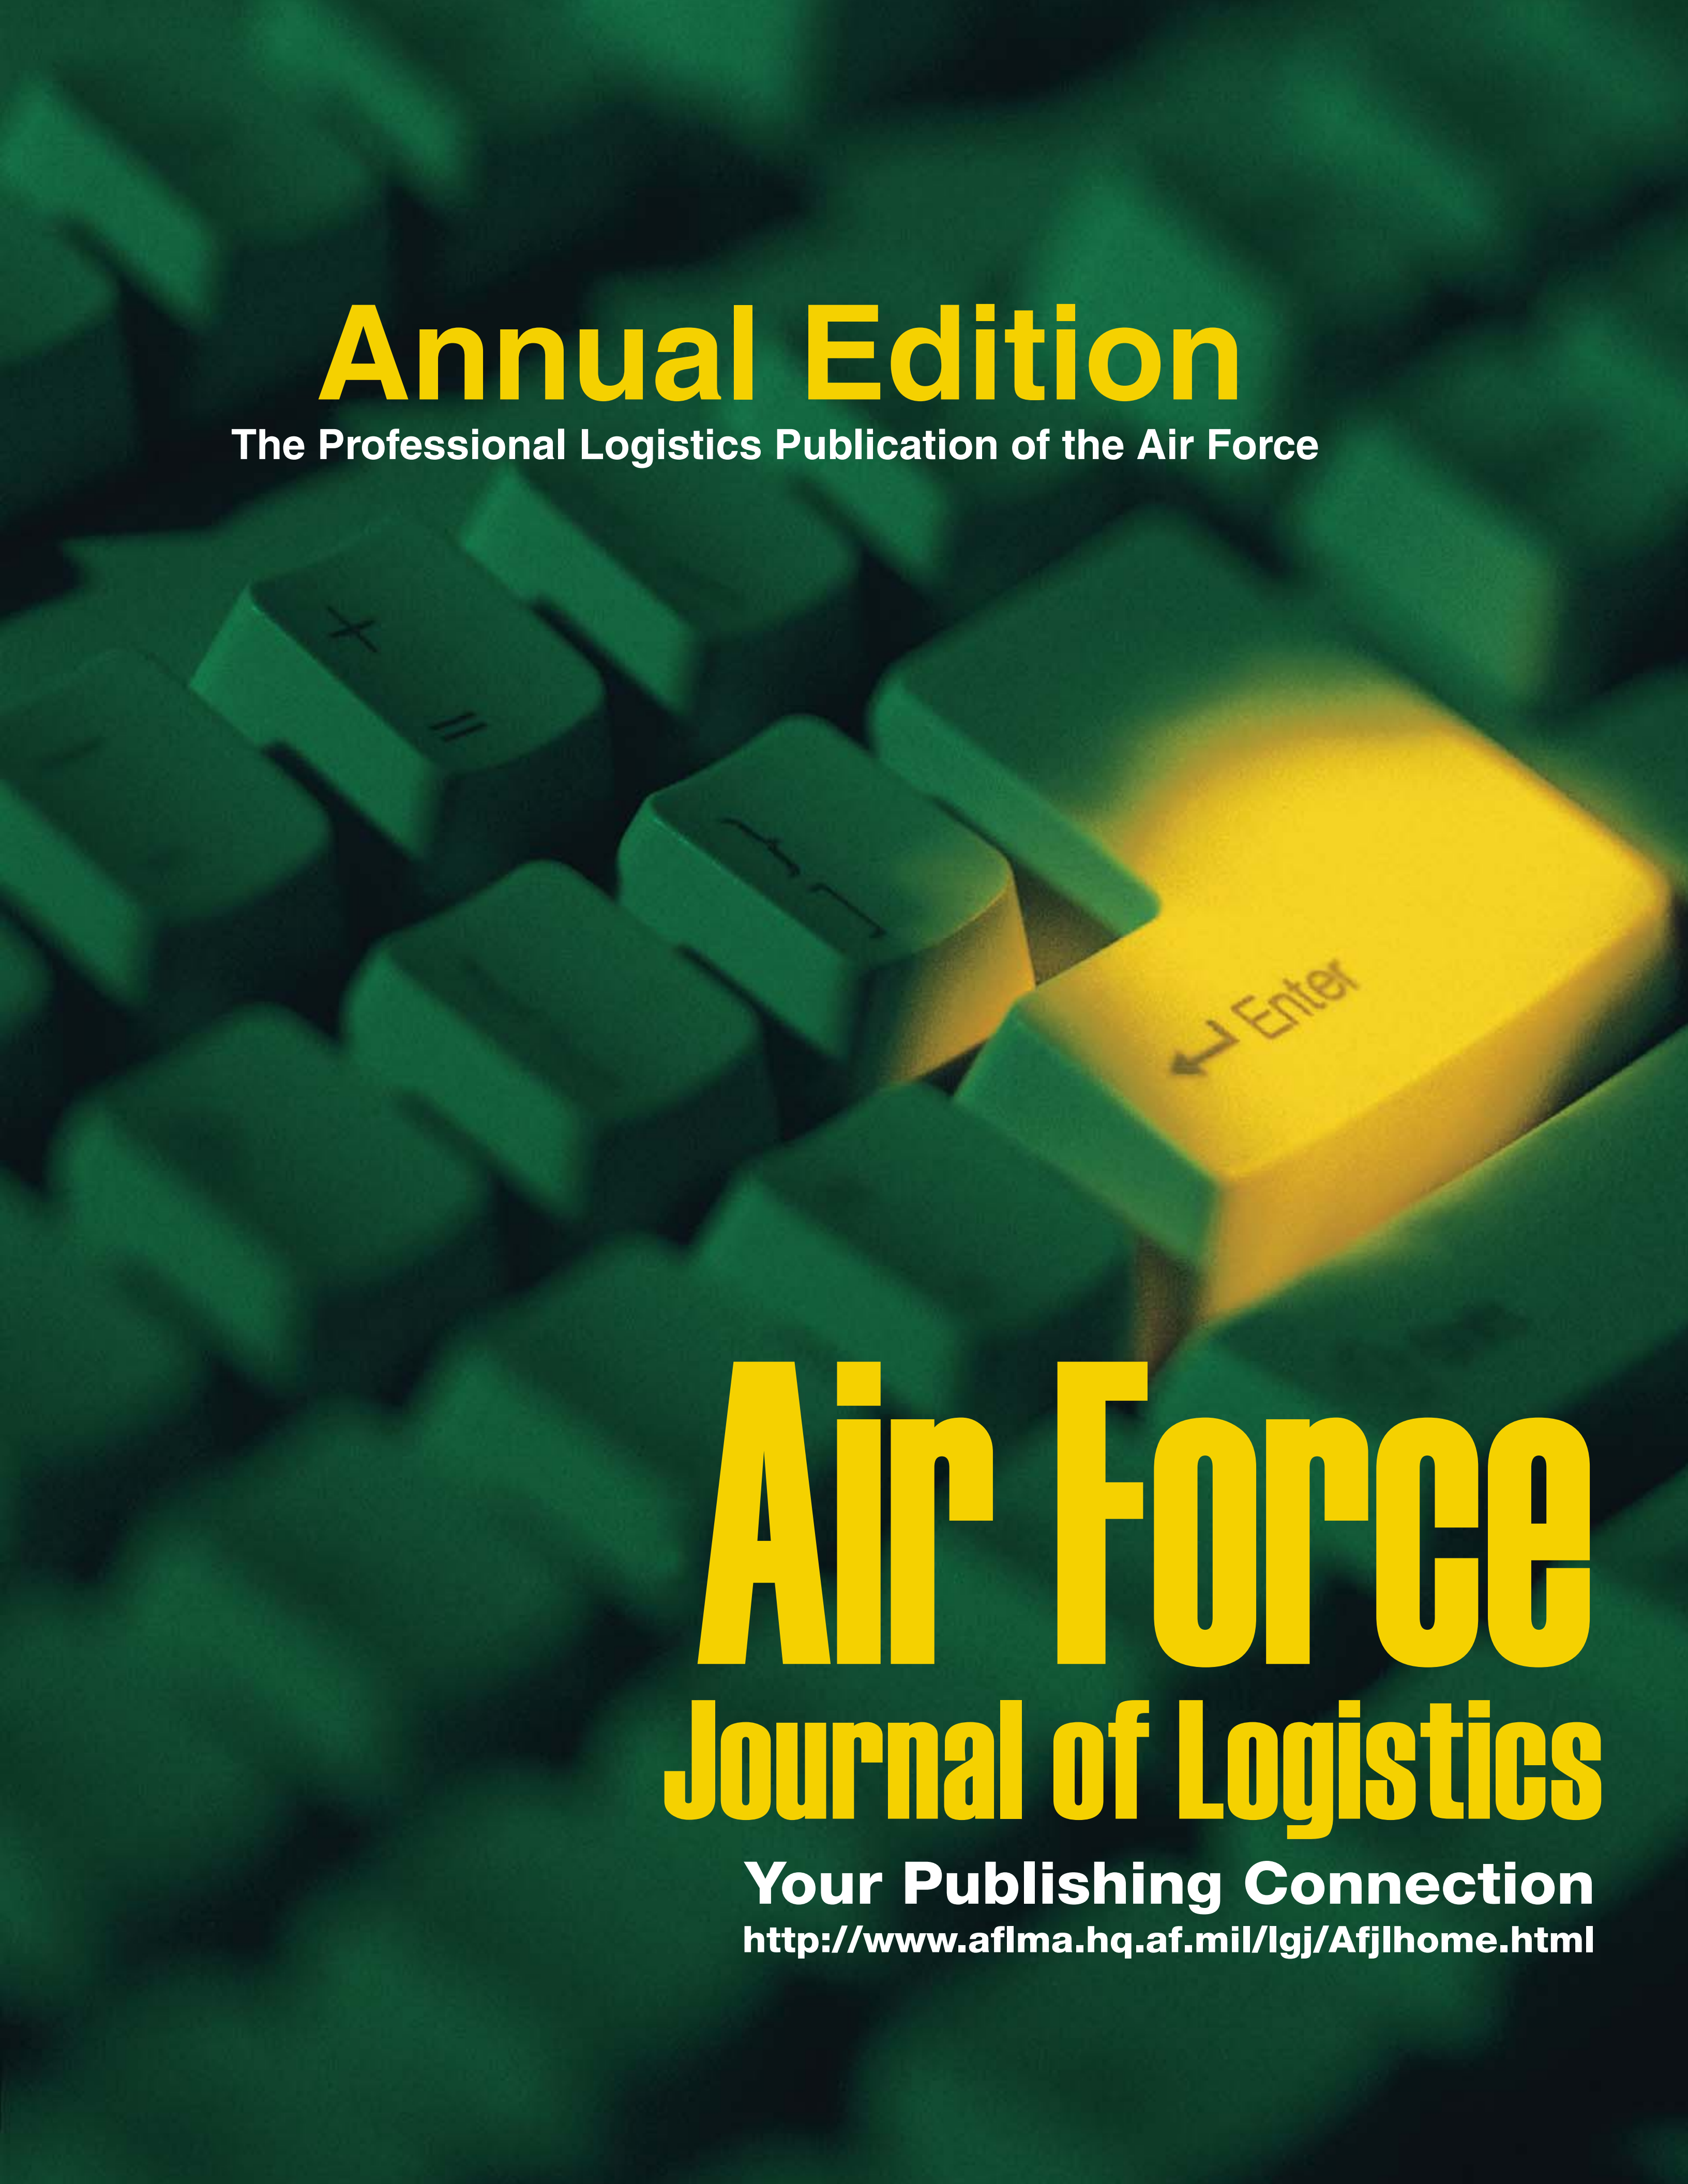

Annual Edition

The Professional Logistics Publication of the Air Force

Air Force Journal of Logistics

Your Publishing Connection

http://www.aflma.hq.af.mil/lgj/Afjlhome.html

Establishing C-5 TNMCM Standards

Scotty A. Pendley, Major, USAF, AFLMA
Benjamin A. Thoele, FitWit Foundation
Jeremy A. Howe, Whirlpool Corporation
Anthony F. Antoline, Major, USAF, AFLMA
Roger D. Golden, DPA, AFLMA

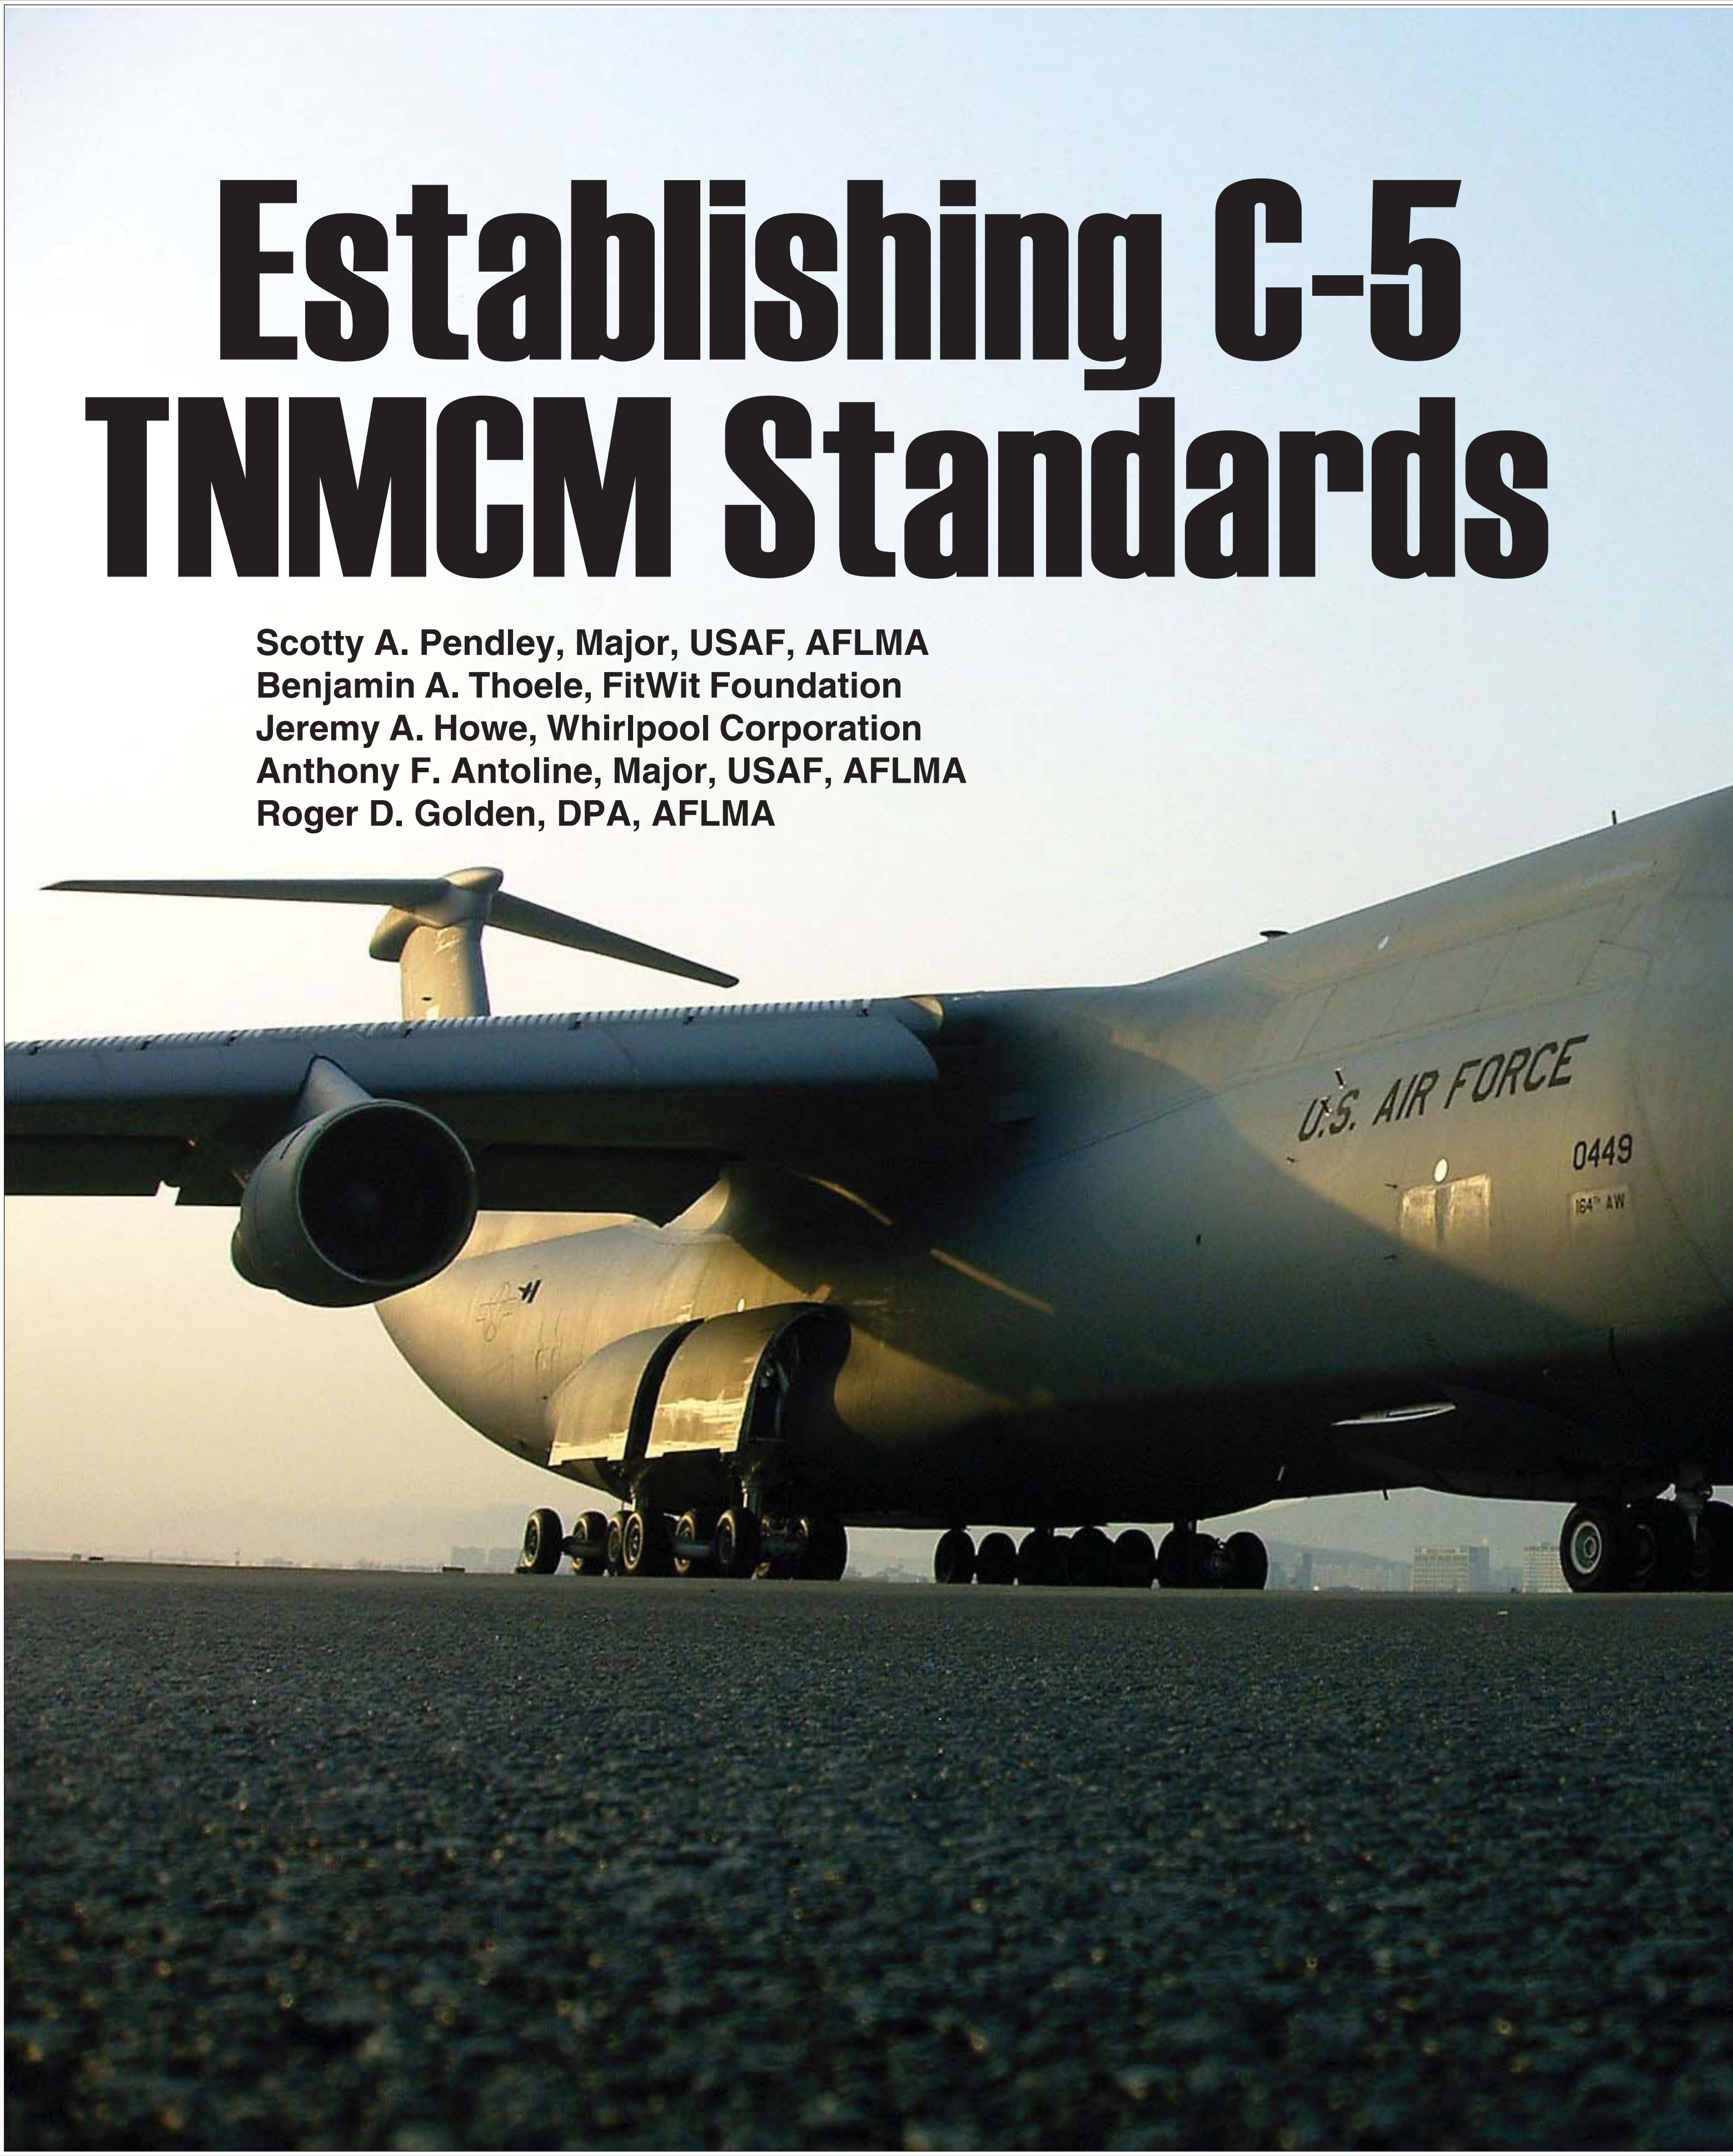

Selected Reading

Air Force Journal of Logistics

Introduction

This article details the process for calculating and establishing Air Force aircraft total not mission capable maintenance (TNMCM) standards. It is impossible to discuss the TNMCM rates and standards without including discussions of the mission capable (MC) and the total not mission capable supply (TNMCS) rates and standards. These three rates are dependent upon one another. Because the rates are percentages of total unit-possessed time, one rate cannot increase or decrease without impacting the other two. The Air Force standards applied to these metrics are interrelated as well. As discussed in this article, the TNMCM and TNMCS standards depend on the MC standard. Thus, the formulation of the MC standard is the foundation for the TNMCS and TNMCM standards.

The 2003 CORONA directed that Air Force-wide standards for MC, TNMCM, and TNMCS be established. While directed toward TNMCM, the research detailed in this article also revealed that the MC standard is the foundation for calculating the other two metric standards. As the process exists currently, the Air Force MC standards are based on requirements which are determined in one of three ways:

- The flying hour or flying schedule requirement
- Contract logistics support (CLS) contract
- Another requirement based on major command (MAJCOM) input determined by the designed operational capability (DOC) statement, readiness study, or any operational requirement the MAJCOM may use

In the case of the Air Force's C-5 Galaxy, Air Mobility Command (AMC) provides the active duty fleet MC standard to the Air Staff based on the *Mobility Requirements Study* (MRS). However, the standard is not actually calculated in the MRS, it is an assumption used in the MRS.

This is not the case for the separate Air Force Reserve Command (AFRC) and Air National Guard (ANG) fleet C-5 MC standards. Those two values are calculated at the Air Staff level. The AFRC MC standard is calculated from utilization rate, attrition, turn pattern, annual fly days, spares, aircraft held down for scheduled maintenance, and primary aerospace vehicles authorized. The ANG MC standard equation uses variables portraying daily operations and maintenance (O&M) flying hours, aircraft taskings per flying day over and

Article Highlights

There are numerous implications for the complex, seemingly disjointed standards methodology that are problematic for the Air Force at the strategic, operational, and tactical levels.

At the request of the Air Force Materiel Command Director of Logistics, AFLMA conducted an analysis in 2006-2007 of total not mission capable maintenance (TNMCM) performance with the C-5 Galaxy aircraft as the focus. The *C-5 TNMCM Study II* included five objectives. One of those objectives was to analyze the process for calculating and establishing TNMCM standards. This article details the analysis conducted in support of that particular study objective.

It is important to recognize that any discussion of TNMCM rates and standards must also include discussions of the mission capable (MC) and the total not mission capable supply (TNMCS) rates and standards. These three rates are dependent upon one another. Because the rates are percentages of total unit-possessed time, one rate cannot increase or decrease without impacting the other two. The Air Force standards applied to these metrics are interrelated as well. As the authors point out, the TNMCM and TNMCS standards depend on the MC standard. Thus, the formulation of the MC standard is the foundation for the TNMCS and TNMCM standards.

The research demonstrates that the process for calculating and establishing Air Force-level TNMCM standards is not well known across the Air Force and not equally applied across the total force. Also, the process currently in use does not produce realistic, capability-based metrics to drive supportable operational decisions.

The authors conclude by recommending that a repeatable methodology be developed to compute the TNMCM standard so that it:

- Reflects day-to-day minimum operational requirements
- Adjusts to fully mobilized force capabilities and surge mobility requirements
- Accounts for historic capabilities and fleet resources

above O&M flying, average number of aircraft required for standard flying operations each day, required daily spares, and the forecasted number of unit possessed aircraft over the year.

Background

This article is the third in a three-part series based on Air Force Logistics Management Agency (AFLMA) project number LM200625500, the *C-5 TNMCM Study II*. At the request of the Air Force Materiel Command Director of Logistics (AFMC/A4), an AFLMA study team conducted an analysis in 2006-2007 of TNMCM performance with the C-5 aircraft as the focus. The *C-5 TNMCM Study II* included five objectives. One of those objectives was to analyze the process for calculating and establishing aircraft TNMCM standards. This article details the analysis conducted in support of that particular study objective.

Maintenance Metric Definitions

Air Force Instruction (AFI) 21-101, *Aircraft Equipment and Maintenance Management,* defines the MC, TNMCS, and TNMCM metrics and their uses. For additional insight on the use of these metrics see *Metrics Handbook for Maintenance Leaders*.

Mission Capable (MC) Rate

Though a lagging indicator, the MC rate is perhaps the best known yardstick for measuring a unit's performance. It is the percentage of possessed hours for aircraft that are fully mission capable (FMC) or partially mission capable (PMC) for specific measurement periods (such as monthly or annually).[1]

$$\text{MC (\%)} = \frac{\text{FMC Hours + PMC Hours}}{\text{Possessed Hours}} \times 100\%$$

Total Not Mission Capable Maintenance (TNMCM) Rate

Though a lagging indicator, the TNMCM rate is perhaps the most common and useful metric for determining if maintenance is being performed quickly and accurately. It is the average percentage of possessed aircraft (calculated monthly or annually) that are unable to meet primary assigned missions for maintenance reasons (excluding aircraft in *B-Type* possession identifier code status). Any aircraft that is unable to meet any of its wartime missions is considered not mission capable. The TNMCM is the amount of time aircraft are in NMCM plus not mission capable both (NMCB) status.[2]

$$\text{TNMCM (\%)} = \frac{\text{NMCM Hrs + NMCB Hrs}}{\text{Possessed Hours}} \times 100\%$$

Total Not Mission Capable Supply (TNMCS) Rate

Though this lagging metric may seem a logistics readiness squadron responsibility because it is principally driven by availability of spare parts, it is often directly indicative of maintenance practices. For instance, maintenance can keep the rate lower by consolidating feasible cannibalization actions to as few aircraft as practical. This monthly (annual) metric is the average percentage of possessed aircraft that are unable to meet primary missions for supply reasons. The TNMCS rate is the time aircraft are in not mission capable supply (NMCS) plus not mission capable both maintenance and supply (NMCB) status. TNMCS is based on the number of airframes out for mission capable (MICAP) parts that prevent the airframes from performing their mission (NMCS is not the number of parts that are MICAP).[3]

$$TNMCS\ (\%) = \frac{NMCS\ Hrs + NMCB\ Hrs}{Possessed\ Hours} \times 100\%$$

Fiscal Year (FY) 2007 C-5 Fleet Standards and Standards Calculations

As previously mentioned, during a 2003 CORONA, the Air Force Chief of Staff (CSAF) directed the establishment of Air Force-wide standards for the MC, TNMCS, and TNMCM metrics. Headquarters (HQ) Air Force Instalations and Logistics (now AF/A4) was named the office of primary responsibility (OPR). Their charter was to develop Air Force standards rooted in operational requirements and resources dedicated to each weapon system or mission design series (MDS). They subsequently developed calculation methodologies for calculating MC, TNMCS, and TNMCM standards. However, as of the time of the original study research, the study team found no official publication documenting the methodology for calculating these maintenance metric standards. Consequently, OPRs at the HQ Air Force and MAJCOM levels provided the study team with the definitions for the calculation methodologies that produced the C-5 fleet maintenance standards used in FY 2007. Table 1 summarizes the 2007 C-5 standard percentage rates for the MC, TNMCS and TNMCM metrics. An explanation of each method for deriving the standards follows.

MC Standard

The MC standard provides the foundation for calculating the other maintenance metric standards. According to HQ Air Force, Directorate of Maintenance, Weapons Systems Division, Sustainment Branch (AF/A4MY) personnel, the MC standards are based on requirements. The MC standard represents the percentage of MC aircraft required at the beginning of each flying day. That requirement is determined by one of the following three ways:[5]

- The flying hour or flying schedule requirement, calculated using Equation 1, 2, or 3.
- Contract logistics support (CLS) contract.
- Some other requirement based on MAJCOM input. That input can be a DOC statement, readiness study, or any operational requirement the MAJCOM may use.

The Air Reserve Component (ARC), a composite of both ANG and AFRC, MC standard is based on the number of aircraft committed to the flying schedule. However, the ANG flying commitment is based on O&M flying hours, transportation working capital fund (TWCF) hours, and the number of operations alert committed aircraft per flying day. Also included is the daily spares requirement. This commitment in aircraft is divided by the forecasted possessed aircraft to determine the MC requirement.[6]

Each year, AF/A4MY personnel request input from AMC for the MC standard. AMC determines the MC rate necessary to meet their airlift requirement and then gives their desired MC rate to Air Staff. Air Staff then uses this rate as the MC standard. This process is currently used to determine the active duty MC standards for the C-17, C-5, C130, KC-10, and KC-135 airframes.[7] These MC standards are based solely on AMC's input. AF/A4MY personnel do not calculate the MC standard for any of the above listed active duty fleets.

Article Highlights

Article Acronyms

AA – Aircraft Availability
AAT – Aircraft Availability Target
AC – Aircraft
ACC – Air Combat Command
AE – Aeromedical Evacuation
AFB – Air Force Base
AFI – Air Force Instruction
AFLMA – Air Force Logistics Management Agency
AFMC – Air Force Materiel Command
AFRC – Air Force Reserve Command
AFSO21 – Air Force Smart Operations for the 21st Century
AMC – Air Mobility Command
ANG – Air National Guard
BE – Business Effort
CLS – Contract Logistics Support
CONOPS – Concept of Operations
CSAF – Chief of Staff, United States Air Force
DOC – Designed Operational Capability
DoD – Department of Defense
FMC – Fully Mission Capable
FY – Fiscal Year
GAO – Government Accountability Office
HQ – Headquarters
LMI – Logistics Management Institute
LRS – Logistics Readiness Squadron
MAJCOM – Major Command
MC – Mission Capable
MCS – Mobility Capabilities Study
MDS – Mission Design Series
MERLIN – Multi-Echelon Resource and Logistics Information Network
MICAP – Mission Capable
MRS – Mobility Requirements Study
NMCB – Not Mission Capable Both
NMCM – Not Mission Capable Maintenance
NMCS – Not Mission Capable Supply
O&M – Operations and Maintenance
OPR – Office of Primary Responsibility
PAA – Possessed Aircraft Authorized
PMC – Partially Mission Capable
REMIS – Reliability and Maintainability Information System
RERP – Reliability Enhancement and Re-Engining Program
TNMCM – Total Not Mission Capable Maintenance
TNMCS – Total Not Mission Capable Supply
TWCF – Transportation Working Capital Fund
UTE - Utilization

		Active Duty	ARC	*AFRC*	*ANG*
MC	Standard	75	50	*50*	*47*
	Method	*MAJCOM Input*	*Equation 3*	*Equation 1*	*Equation 2*
TNMCS	Standard	8	8		
	Method	*Equation 4*	*Equation 4*		
TNMCM	Standard	24	50		
	Method	*Equation 6*	*Equation 6*		

Table 1. FY 2007 C-5 Maintenance Standards and Calculation Methodologies[4]

The three MC standard requirement algorithms are detailed in Equations 1, 2, and 3. Equation 1 is typically used with active duty aircraft fleets.

$$MC_{Std} = \left[\frac{12 \times UTE}{(1 - Attrition) \times (Turn\ Pattern) \times (Fly\ Days)} \right] + \left[\frac{Spares + MC_{SchdMX}}{PAA} \right]$$

Equation 1. MC Standard[8]

Where:

MC_{std} is MC Standard.

UTE is the sortie utilization rate, which is the number of sorties required to fly each month by authorized aircraft. 12 x *UTE* yields the annual sorties required to meet the flying hour program (FHP).

Attrition is the annual attrition rate of sorties lost due to operations, maintenance, and other considerations such as weather. Dividing by (1-*Attrition*) yields the sorties required to be scheduled to account for attrition.

Turn pattern, or turn rate, is the total number of sorties scheduled divided by the number of *first go* sorties. For example: a unit schedules 100 sorties during the week and 60 of them occur on the *first go* of the day. The turn rate would be 100/60 = 1.67. Dividing by *turn pattern* yields the number of front-line flyers. Dividing by the number of *fly days* yields the number of front-line flyers per day.

Fly Days = 232. This figure assumes 244 *working days* minus 12 *goal days*.

Spares, or front line spares, is the number of scheduled spare aircraft for the *first go*.

MC_{SchdMX} is the average number of aircraft per squadron held down on each flying day for scheduled maintenance including delayed discrepancies, health of the fleet management, washes, and so forth.

Spares + MC_{SchdMX} is expressed as a percentage of squadron possessed aircraft authorized (PAA).

PAA is the number of aircraft authorized for a unit to perform its operational missions.[9]

Equation 2 is the algorithm used by the ANG.

$$MC_{ANG} = \left[\frac{\lceil AC_{O\&M} + AC_{TWCF/BE/AE} + AC_{Ops} + Spares \rceil}{AC_{Forecast}} \right]$$

Equation 2. MC Standard for ANG[10]

Where:

$AC_{O\&M}$ is the average number of committed aircraft based on the O&M requirements per flying day.

$AC_{TWCF/BE/AE}$ is the number of aircraft required for taskings per flying day that the ANG supports above its O&M flying (such as TWCF, aeromedical evacuation (AE), business effort [BE]).

AC_{Ops} is the average number of aircraft required for standard flying operations per flying day.

Spares is the same as in Equation 1, but is reported as the number of aircraft per flying day.

$AC_{Forecast}$ is the number of aircraft that are expected to be unit possessed over the year based on depot maintenance schedules and other considerations.

$\lceil x \rceil$ shown in the numerator of Equation 2 denotes the smallest integer greater than or equal to *x*. This function rounds any decimal value up to the next whole number. The ceiling function is used in order to speak in terms of whole aircraft.

Equation 3 is utilized to calculate the MC standard for the composite ARC portion of an aircraft fleet.

$$MC_{ARC} = \frac{(MC_{AFRC} \times PAA_{AFRC}) + (MC_{ANG} \times PAA_{ANG})}{PAA_{AFRC} + PAA_{ANG}}$$

Equation 3. MC Standard for ARC Fleet[11]

The MC standard for the AFRC (MC_{AFRC}) fleet is calculated using the standard MC equation given in Equation 1. For simplicity, the result of this formula is rounded to the nearest tenth.

TNMCS Standard

Active duty and ARC fleets use the same methodology for TNMCS once the MC standard is established. This calculation is shown in Equation 4. Note that separate TNMCS standards for AFRC and ANG are not calculated.

$$TNMCS_{Std} = 1 - AAT$$

Equation 4. TNMCS Standard[12]

The aircraft availability target (AAT), ties the TNMCS standard to the funding and requirements for spare parts that are calculated in the Requirements Management System.[13] It assumes the supply pipeline and spare safety levels are fully funded. The *AAT* for the C-5 has been at 92 since the beginning of the maintenance standard development. This yields a TNMCS standard of 8 which is applied to both ARC components.

Equation 5 defines the aircraft availability target calculation.

$$AAT = Required\ MC + NMCM_{3\ year\ historical}$$

Equation 5. AAT Calculation[14]

Required MC is determined the same way that the Air Force active duty MC standard is determined.[15]

$NMCM_{3\ year\ historical}$ is the 3-year historical average of the NMCM rate for the particular MDS under consideration.

It is important to note that the maintenance metrics standards established for FY07 (Table 1) used the FY05 calculated AATs.

This is because the C-5 parts on the shelf in FY07 were based on the FY05 AATs.[16] As just mentioned, the FY05 AAT for the C-5 fleet was 0.92. The Logistics Management Institute (LMI) updated the AAT-setting methodology in 2006 to include computations for *Required MC* and NMCM rates for both day-to-day operations and predeployment.[17]

TNMCM Standard

Active duty and ARC fleets use the same methodology for TNMCM once the respective MC standard is established. This calculation is shown in Equation 6. Note that separate TNMCM standards for AFRC and ANG are not calculated.

$$TNMCM_{Std} = 1 - (MC_{Std} + TNMCS_{Std}) + NMCB_{3\ yr\ historical}$$

Equation 6. TNMCM Standard[18]

$NMCB_{3\ yr\ historical}$ is the average NMCB rate over the previous 3 years. The data used for the FY07 calculation came from the Reliability and Maintainability Information System (REMIS); the average NMCB for FY04, FY05, and FY06 equaled 0.07.[19]

Standards Calculation Examples

This section applies the above formulas to the real-world data that produced the metric standards in Table 1.

FY07 Active Duty C-5 Fleet

MC Standard (MAJCOM Input):

AMC stated that the MC standard is 0.75 (75 percent) based on an operational requirement used in the Mobility Requirements Study (MRS) 2005 (MRS-05).

TNMCS Standard (Equation 4):

$$TNMCS_{Std} = 1 - AAT = 1 - 0.92 = 0.08$$

TNMCM Standard (Equation 6):

$$\begin{aligned} TNMCM_{Std} &= 1 - (MC_{Std} + TNMCS_{Std}) + NMCB_{3\ yr\ historical} \\ &= 1 - (0.75 + 0.08) + 0.07 \\ &= 0.24 \end{aligned}$$

FY07 ARC C-5 Fleet

The data required to calculate the ARC standards for FY07 is given in Table 2. AFRC and ANG provided the data in response to the FY07 Air Force Standards Data Call.

The PAA numbers the commands provided were 32 for the AFRC and 16 for the ANG. These values reflected the PAA before the PAA was adjusted to accommodate units recently gaining C-5s. To compute the AFRC MC standard, AF/A4MY used the PAA based on AFRC input, which was 32. However, for the Of weights in determining the composite ARC MC standard, AF/A4MY used the PAAs for FY07, which included the additions for the gaining units. These values are 40 for AFRC and 29 for ANG.

AFRC MC Standard (Equation 1):

$$MC_{AFRC} = \left[\frac{12 \times UTE}{(1 - Attrition) \times (Turn\ Pattern) \times (Fly\ Days)}\right] + \left[\frac{Spares + MC_{SchdMX}}{PAA}\right]$$

$$MC_{AFRC} = \left[\frac{12 \times 8.5}{(1-0.23) \times (1.3) \times (232)}\right] + \left[\frac{2+0}{32}\right] = \left[\frac{102}{232.232}\right] + \left[\frac{2}{32}\right] = 0.502$$

ANG MC Standard (Equation 2):

$$\begin{aligned} MC_{ANG} &= \left[\frac{[AC_{O\&M} + AC_{TWCF/BE/AE} + AC_{Ops} + Spares]}{AC_{Forecast}}\right] \\ &= \left[\frac{[3.84 + 1.19 + 0.45 + 1.3]}{15}\right] \\ &= \left[\frac{[6.78]}{15}\right] = \left[\frac{7}{15}\right] = 0.47 \end{aligned}$$

ARC MC Standard (Equation 3):

$$\begin{aligned} MC_{ARC} &= \frac{(MC_{AFRC} \times PAA_{AFRC}) + (MC_{ANG} \times PAA_{ANG})}{PAA_{AFRC} + PAA_{ANG}} \\ &= \frac{(0.50 \times 40) + (0.47 \times 27)}{67} = 0.488 \approx 0.50 \end{aligned}$$

TNMCS Standard (Equation 4):

$$TNMCS_{Std} = 1 - AAT = 1 - 0.92 = 0.08$$

TNMCM Standard (Equation 6):

$$\begin{aligned} TNMCM_{Std} &= 1 - (MC_{Std} + TNMCS_{Std}) + NMCB_{3\ yr\ historical} \\ &= 1 - (0.50 + 0.08) + 0.08 \\ &= 0.50 \end{aligned}$$

note is the fact that the 3-year average NMCB was actually 0.166 (based on Multi-Echelon Resource and Logistics Information Network [MERLIN] data). AF/A4MY capped the NMCB at 0.08 because the historical NMCB cannot theoretically exceed the TNMCS. Recall that TNMCS is the sum of NMCS and NMCB; therefore, NMCB *should be* less than or equal to TNMCS.[21] The TNMCS standard is established as a resourced goal and the Air Force is trying to achieve a balance in the maintenance standards.[22]

AMC Determination of the C-5 MC Operational Requirement

According to AF/A4MY and AMC/A4MXA, AMC provides Air Staff with the value for the MC standard for the active duty fleet. This standard has been 75 percent since 2003, the year that Air Force-wide standards were implemented.[23] AMC/A4MXA stated that the value of 75 percent was based on the MRS.[24] According to the AMC/A9 office, every major mobility study including the MRS (1992), the *MRS Bottom-Up Review Update* (1995), MRS-05 (2000), and the *Mobility Capabilities Study* (2005), has used 75 percent as the C-5 MC rate standard to

	PAA Command Input	PAA (FY07 Actual)	UTE	Attrition	Turn Pattern	Fly Days	Spares	MC for Sched Mx
AFRC	32	40	8.5	0.23	1.3	232	2	0

	PAA Command Input	PAA (FY07 Actual)	O&M AC/day	TWCF,BE, AE AC/day	Spares/ day	Ops AC/day	Possessed AC Forecast
ANG	16	27	3.84	1.19	1.3	0.45	15

Table 2. Data for AFRC and ANG MC Standard Calculations[20]

determine the capability of the C-5 fleet to support the mobility forces.[25]

Examination of the MRS-05 revealed the MRS-05 did not calculate an MC standard; the MRS-05 assumed an MC rate of 76 percent for a fleet in which all C-5s have had the Reliability Enhancement and Re-Engining Program (RERP) modifications. The MRS-05 explains that the use of 76 percent MC rate is because of expected RERP improvements. The study also assumes a 65 percent MC rate for aircraft that have not received the RERP improvements.[26] The director of the AMC office of Analysis, Assessments, and Lessons Learned (AMC/A9) concurred that the C-5 MC standard is not based on any formal calculation or analysis, and stated that the original estimate (circa 1990) of a 75 percent MC rate was deemed "a prudent objective" for planning purposes.[27] AMC/A9 stated that the 75 percent MC rate assumes a fully mobilized total force to support C-5 maintenance operations.[28]

In summary, the FY07 MC, TNMCS, and TNMCM standards for the C-5 active duty fleet are based on the assumption that the C-5 fleet can achieve a 75 percent MC rate with the entire fleet receiving RERP upgrades or a fully mobilized total force to support maintenance operations.

Implications of the Methodology

There are numerous implications of this complex, seemingly disjointed standards methodology that are problematic for Air Force members at the strategic, operational, and tactical levels. First, Equation 1, in its present state, is more appropriate for fighter aircraft than mobility aircraft.[29] For example, the *Turn Pattern* and MC_{SchdMX} variables are reflective of fighter aircraft flying schedules. Mobility aircraft are less often *turned* on the same flying day, and mobility aircraft units, having a relatively small number of PAA, often have less opportunity to hold aircraft down for fleet health purposes. Consequently, this is a contributing factor to AF/A4MY's rationale of using AMC's input to determine active duty standards. The study team concluded that if Equation 1 is not appropriate for heavy aircraft, then it should not be used as a foundation for the MC standard. The variables used to measure performance need to accurately reflect the relevant process.

An additional issue is a lack of consistency across the total force components. The active duty component uses AMC input to determine the MC standard, but the ARC uses calculation methodology. Moreover, in addition to the planning objective used to determine the active duty maintenance standards and the calculations used to determine the ARC standards, the total force components, including the ANG, have maintenance metric goals. These goals are separate from the Air Force standards and are calculated differently. Within the ANG, units report their performance with regard to the ANG goals, and not necessarily the ARC metric standards. While the functional mission differences between fighter and mobility aircraft may justify distinct calculation methodologies, inconsistencies within a given airframe (for example, the C-5) are less easily supported. Consistency, in fact, is identified by AFI 21-101 as one of four important characteristics of a metric. These four characteristics are:

- Accurate and useful for decisionmaking
- Consistent and clearly linked to goals or standards
- Clearly understood and communicated
- Based on a measurable, well-defined process[30]

The fourth characteristic mentioned above highlights another concern given the current methodology for calculating the C-5 standards. Fundamentally, the process is not rigidly followed as part of formal policy; rather, the practice of establishing standards involves numerous deviations, discussed at length earlier in this article (active duty MC input, AAT from FY05, ANG goals). Simply stated, there was no complete, published, defined process. In April 2003, the United States Government Accountability Office (GAO) discussed these same issues in a report addressing aircraft availability goals across the Department of Defense (DoD).[31] The GAO found that all branches of military Service fail to clearly define the standards computation process for aircraft maintenance metrics.

The following selected comments were taken from the GAO report's executive summary:

> Despite their importance, DoD does not have a clear and defined process for setting aircraft availability goals. The goal-setting process is largely undefined and undocumented, and there is widespread uncertainty among the military Services over how the goals were established, who is responsible for setting them, and the continuing adequacy of MC and FMC goals as measures of aircraft availability. DoD guidance does not define the availability goals that the Services must establish or require any objective methodology for setting them. Nor does it require the Services to identify one office as the coordinating agent for goal setting or to document the basis for the goals chosen.[32]

Speaking in terms of consequence, the GAO suggested that the "lack of documentation in setting the goals ultimately obscures basic perceptions of readiness and operational effectiveness."[33] Additionally, the report documented several findings specifically relevant to establishing standards for the Air Force. These findings included:

- Air Force officials told [the GAO] that they generally try to keep the goals high because it is difficult to stop the goals from dropping further once they begin to be lowered.[34]
- Air Combat Command could find no historical record of the process used to establish most of the goals.[35]
- AMC compared the goals with the actual rates for the previous 2 years. Depending upon actual performance, the goal could then be changed, sometimes on the basis of subjective judgments.[36]

It is vitally important to examine the effectiveness and validity of metrics and their associated standards. Many hours are spent preparing for and participating in meetings discussing the performance of organizations, all of which is wasted if the metrics or standards are ineffective at measuring organizational performance and driving the desired behavior. Budgets and other requirements are driven in part from metrics. If the metrics being utilized are not valid, the effectiveness of the organization to meet warfighter needs is also difficult to accurately measure.

Air Force maintenance metrics are presented with an associated numerical standard or goal[37] and managers are required to account for failure to meet those standards. These failures are reported at unit, command, and Air Force levels, but what if the established standard is inaccurate, unrealistic, or unattainable? Consider Table 3, which identifies historical MC performances for the C-5 at various points in time compared with the assumption used in establishing the C-5 MC standard.

During Operations Desert Shield and Desert Storm in FY91, the MC rate was less than 71 percent. During Operation Iraqi Freedom in FY03, the MC rate was less than 64 percent. This is particularly intriguing because numerous personnel interviewed during the original research suggested MC rates have been or should be usually better during conflicts.[39] Indeed, the highest quarterly MC rate the C-5 total fleet achieved, 81.8 percent, was observed during first quarter of FY91 (during Operation Desert Shield). Considering the data points in Table 3 are rates achieved during wartime scenarios, the feasibility of using 75 percent as the day to day, peacetime C-5 MC standard appears questionable at best.

Still, consistent failures to meet a standard can often be perceived as a shortfall in the performance of the units supporting the C-5, rather than an unrealistic expectation not being met. Again, a tremendous amount of time and effort is put forth explaining why standards are not met. Historical C-5 MC rate performance would suggest that the standard and its associated metric are not driving improvement in performance, which is the fundamental purpose of a performance measure. A metric and its associated standard should drive performance, not simply document it, and the measure should be useful for decisionmaking. Additionally, the *Air Force Smart Operations for the 21st Century Concept of Operations (CONOPS)* identifies good process metrics as having the following attributes:[40]

- Accurate – reliably expresses the phenomenon being measured
- Objective – not subject to dispute
- Comprehensible – readily communicated and understood
- Easy – inexpensive and convenient to compute
- Timely – data sources are available
- Robust – resistant to being gamed and hard to manipulate[41]

As previously stated, the current standards methodology involves differences across the total force. Additionally, the study team interviewed many subject matter experts while conducting site visits for this research. Some of them indicated the consistent inability to achieve an MC standard of 75 percent led to an attitude of frustration, indifference and apathy towards the standards.[42] AFI 21-101 states that "metrics shall be used at all levels of command to drive improved performance."[43] In the case of the C-5, the existing maintenance standards methodology associated with the MC and TNMCM metrics appear to cause those metrics to fall short of this goal.

Alternative Strategies to Performance Measurement

As described in the second article in this series, the AFLMA study team interviewed representatives from the Delta Airlines reliability programs office as a means of comparing business practices. Delta personnel identified nine main aircraft maintenance metrics. Of note was the fact that Delta's primary metrics (those driven by delays and cancellations) were not measured to an objective standard (met or not met); instead, they alert when they exceed a control limit for 2 consecutive months.[44]

Using control limits, found in control charts, is a commonly used technique for determining if a process is in a state of statistical control. First developed by Shewhart, many influential quality leaders have advocated the proper use of control charts, most notably W. Edwards Deming. Generally speaking, recent data is examined to determine the control limits that apply to future data with the intent being to ascertain whether the process is in a state of control.[45] Charts alone cannot induce process control; stabilization or improvement is the challenge of people in the process.[46] Viable control limits can only be developed for processes in a state of statistical control, and they are best applied to process variables rather than product variables.[47] For example, consider the manufacturing process of a metal component. The product variables might be thickness or diameter, whereas process variables could be temperature or pressure at the point of forging. The benefit of monitoring process variables better allows someone to assign cause to variation. Using the previous example, variance in component diameter indicates a problem but requires further investigation to determine the cause. However, excessive pressure measurements identify the cause behind improper component diameter. Essentially, process variable measurements identify causes that could affect product variables.[48]

Today, many maintenance units are using versions of control charts to monitor performance in terms of the various metrics listed in AFI 21-101.[49] For example, Figure 1 illustrates TNMCM performance (large solid black line), with upper and lower control limits (represented by the solid red lines), at Dover Air Force Base (AFB) during calendar year 2006. Although the effort to use control charts is a step in the right direction, there can be two major problems associated with the use of charts akin to those of Figure 1.

First, Air Force metric measurements such as TNMCM are not process variables; consequently, they do not lend themselves to the immediate, precise root-cause analysis that usually follows from control charts. This is evidenced by the copious explanatory notes pages accompanying products like the CSAF quarterly review slideshow.[51] In fact, the *C-5 TNMCM II* study team's analytical effort identified 184 factors that bear influence on the C-5 TNMCM rate. An additional confounding element is that status of aircraft and the categorization of hours (such as *possessed*) bear direct influence on the outcome of rates such as TNMCM, and this process is not consistent. Study team discussions with maintenance personnel revealed that aircraft status is not an exact science, and status documentation can be vulnerable to manipulation for the sake of improving numbers. For example, this can happen by delaying aircraft status changes

	MC Rate	Time Period
AMC C-5 MC Standard	75%	~1990 – Present[38]
Operation Desert Shield/Desert Storm	70.6%	Fiscal Year 1991
Operation Iraqi Freedom	63.4%	Fiscal Year 2003
Highest Quarterly MC Rate Achieved	81.8%	Fiscal Year 1991, Quarter 1

Table 3. C-5 Fleet Historically Achieved MC Rates[38]

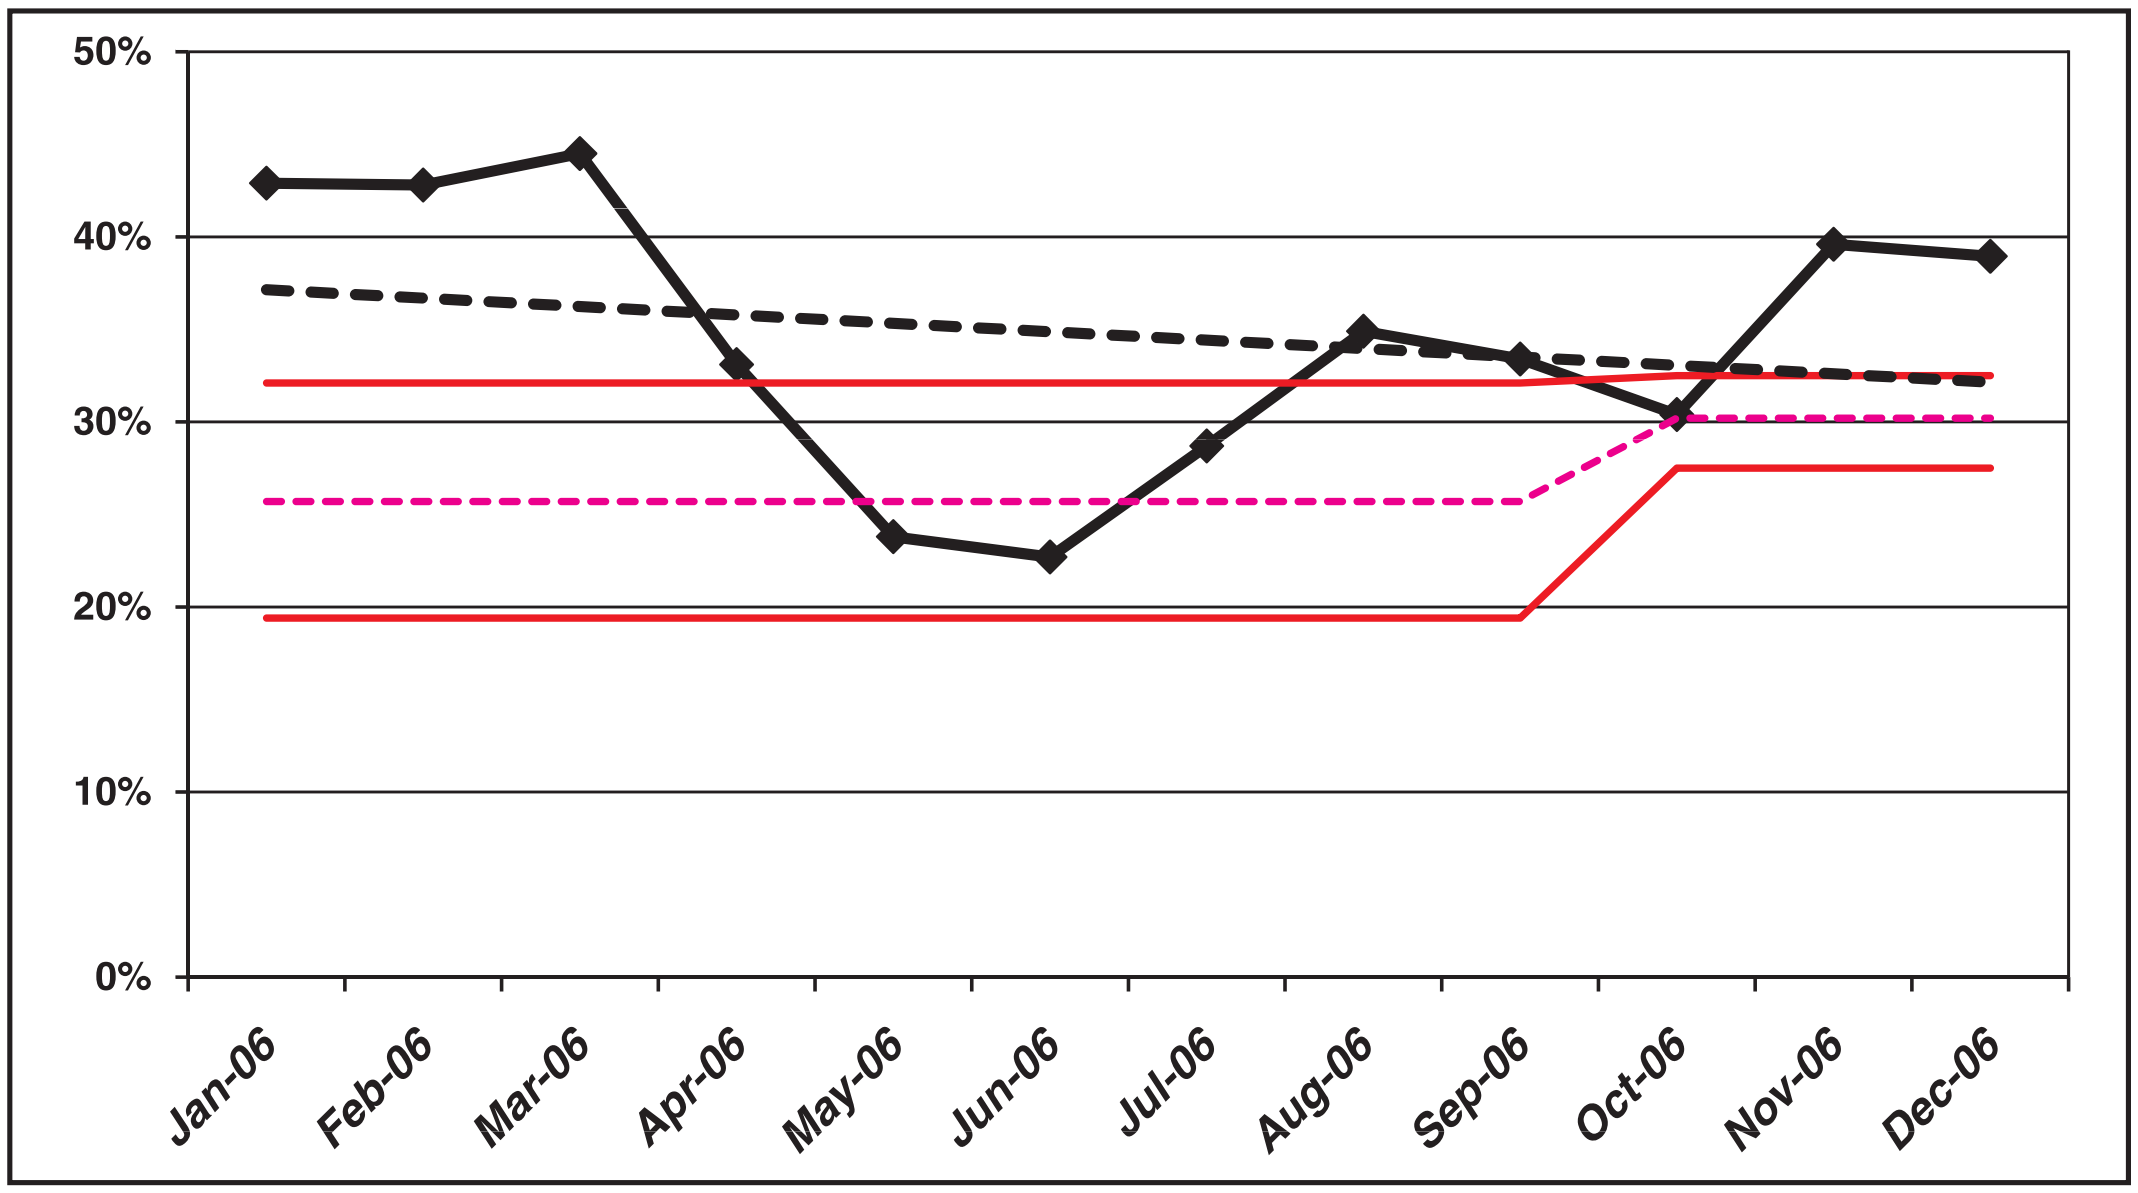

Figure 1. Example of TNMCM Control Chart, Dover AFB 2006[50]

by not changing the status to NMCM or NMCS as soon as an aircraft breaks and maintenance is underway or work stoppage occurs due to needed parts.

The categorization of hours is something that is in stark contrast with the host of metrics used by Delta Airlines, which upon examination appeared more tangible, more easily measured, and less easily manipulated. Again, a thorough discussion of Delta's maintenance metrics was included in the second Air Force Journal of Logistics article in this series.

Next, upon examination of the control chart in Figure 1, one sees that the centerline mean (small dashed line between the solid red lines) is set at 30.2 for the months in FY07, with the upper and lower control limits set at 32.5 and 27.5, respectively.[52] The study team sought to uncover the specific methodology used to arrive at the centerline mean, as well as the upper and lower control limits. Personnel at Dover stated that the control limits are downward directed from headquarters AMC. The managing office at AMC stated that the control limits were derived from 2 years of historical data for all of AMC, with a range of one standard deviation above and below the mean.[53] There are two issues with this approach. First, the figure is not arrived at through subgroup sampling of at least 20 subgroups, as advocated by statistical analysis literature.[54] Secondly, this centerline mean is known as the *AMC goal* for the TNMCM rate. Interestingly, it is higher (that is, less ambitious) than the active duty TNMCM standard, which was 24 for the FY07 timeframe. The fact that AMC units are using a different figure than the established active duty standard for management purposes is further evidence that fleet standards appear to have limited influence on performance at base levels.

However, as noted in the 2005 AMC Metrics Handbook, because AMC command goals are rooted in wartime operational requirements, there are some standards that are difficult or impossible to achieve during peacetime operations.

> Using the *command average* is one way around this shortcoming. Comparing (your base) to command averages helps to gauge true performance and is invaluable for identifying if a problem is local or fleet wide. AMC weapons system managers (WSMs) use command averages for understanding overall performance of their fleets. When discussing performance problems with AMC WSMs, base personnel should have a good understanding of where their base performance numbers are in relation to the command average.[55]

It should be noted that the study team was not advocating the use of the active duty standard as the centerline mean for this control chart. In fact, extreme caution must be taken when using a standard value as opposed to the sampling mean as the centerline for performance. Although the intent might be to control the process mean at a particular value, one runs the risk that the current process is incapable of meeting that standard. For example, if the lower and upper control limits are calculated from the standard, and the current process mean exceeds the standard, subgroup averages might often exceed the upper limit, even though the process is in control. This lessens the ability to determine assignable causes of variation, because the only observation is that the process isn't conforming to the desired value.[56] This may, in fact, be what was actually occurring with the MC metrics for the C-5 fleet.

What Should the TNMCM Standard Be?

If the existing standard's equations were used with current C-5 aircraft data (rather than using the 75 percent MC input from AMC for the active duty fleet) to calculate the active duty fleet MC, TNMCS, and TNMCM standards, the resulting standards[57] would be:

- MC Standard = 56.8
- TNMCS Standard = 20.6
- TNMCM Standard = 29.3

These figures are presented for informational purposes only in order to illustrate the stark contrast with the active duty standards in place at the time of the original report's publication (MC = 75, TNMCS = 8, and TNMCM = 24). The study team was not advocating the use of the standards presented above. Instead, the examination presented here and in the study report led to the recommendation that AMC and Air Staff develop a repeatable methodology to compute a standard focused on three things. These three things are listed in the recommendations section of this article. Such a methodology would better align to the original charter from the 2003 CORONA, which was to develop Air Force standards rooted in operational requirements and resources dedicated to the weapon system or MDS.

Conclusions

The process for calculating and establishing Air Force-level TNMCM standards is not well known across the Air Force and not equally applied across the total force. Also, the process currently in use does not produce realistic, capability-based metrics to drive supportable operational decisions.

Recommendations

Develop a repeatable methodology to compute the standard that:

- Reflects day-to-day minimum operational requirements
- Adjusts to fully mobilized force capabilities and surge mobility requirements
- Accounts for historic capabilities and fleet resources

As previously mentioned, the analysis of maintenance metric standards described in this article was developed as part of the larger *C-5 TNMCM Study II*. This is the third and final article in a series related to that particular research. The entire study report can be found at the Defense Technical Information Center private Scientific and Technical Information Network Web site at https://dtic-stinet.dtic.mil/.

Notes

1. AFI 21-101, *Aircraft and Equipment Maintenance Management*, HQ USAF/A4MM, 29 June 2006, 27-28.
2. AFI 21-101, 28.
3. *Ibid*.
4. AF/A4MY, Metrics Chart with Air Staff Input, 6 February, Excel spreadsheet, 6 February 2007.
5. *Ibid*.
6. AF/A4MY, "C5 AFRC_ANG MC STD Explanation," e-mail, 11 May 2007.
7. AF/A4MY, 6 February 2007.
8. AF/A4MY, *C-5 Maintenance Standards Methodology*, PowerPoint presentation, 27 October 2006, 7-9.
9. AFI 21-101, 28.
10. AF/A4MY, 11 May 2007.
11. *Ibid*.
12. AF/A4MY, 27 October 2006, 3.
13. *Ibid*.
14. Logistics Management Institute, *Aircraft Availability Targets*, Report Number AF510T1, May 2006, 2-1.
15. Logistics Management Institute, 2-2.
16. AF/A4MY, 27 October 2006, 3.
17. Logistics Management Institute, 3-1.
18. AF/A4MY, 27 October 2006, 3.
19. Figures validated with MERLIN data; actual mean is 0.68 which is rounded to 0.7.
20. AF/A4MY, 11 May 2007.
21. AF/A4MY, 27 October 2006, 3.
22. AF/A4MY, 11 May 2007.
23. AF/A4MY, 27 October 2006, 2.
24. AMC/A4XM, FY 2007 Air Force Standards Data Call, Attachment 1, Excel spreadsheet, 7 February 2007.
25. Dave Merrill, AMC/A9, e-mail, 7 May 2007.
26. Joint Chiefs of Staff, *Mobility Requirements Study-05 Executive Summary*, Washington, DC: The Joint Staff, 23 January 1992, 5.
27. Dave Merrill, AMC/A9, telephone conference call, 8 May 2007.
28. *Ibid*.
29. Skip Tyler, AF/A4MY, telephone interview, 12 January 2007; AMC Metrics Handbook, 11.
30. AFI 21-101, 433.
31. General Accountability Office, *DOD Needs a Clear and Defined Process for Setting Aircraft Availability Goals in the New Security Environment*, Report Number GAO-03-300, April 2003.
32. GAO, executive summary.
33. *Ibid*.
34. GAO, 15.
35. GAO, 28.
36. *Ibid*.
37. The Air National Guard uses the term *goal* as opposed to *standard*. This information was obtained from a NGB/A4 Health of the Fleet, PowerPoint presentation, January 2007.
38. REMIS Data.
39. Personnel interviews, study team site visits, January 2007.
40. AFSO21 Concept of Operations, Version 1.0, 15 November 2006, 19. Taken from Dr Michael Hammer, Hammer and Company, Harnessing the Power of Process, 2006.
41. *Ibid*.
42. Study team site visits, personnel interviews, January 2007.
43. AFI 21-101, 23.
44. *Ibid*.
45. Thomas P. Ryan, *Statistical Methods for Quality Improvement*, Wiley & Sons, 2000, 77-134.
46. *Ibid*.
47. *Ibid*.
48. *Ibid*.
49. Study team site visits and personal interviews, Dover AFB and Westover ARB, January 2007.
50. Dover Air Force Base, Display Case MXG Metrics, PowerPoint presentation, 26 January 2007, slide 2.
51. CSAF Quarterly Review Slideshow, second quarter FY 2006, 31 March 2006.
52. Personal interview, AMC/A4XM, 10 May 2007.
53. *Ibid*.
54. Ryan, 82-86.
55. AMC/A44A, *Metrics Handbook for Mobility Air Forces*, 3d ed., April 2005, 7.
56. Ryan, 98.
57. Data Sources: *UTE, Spares, Required Mx MC, PAI*: FY07 Air Force Standards Data Call Spreadsheet, AF/A4MY. *Attrition, Turn rate*: Personnel interviews, Dover AFB. *NMCM 2 year historical, NMCB 3 year historical*: MERLIN data pull for AMC, FY04 – FY06, 15 May 2007.

Major Scotty A. Pendley *is currently the Chief, Maintenance Studies Branch, Logistics Innovation Studies Division, Air Force Logistics Management Agency.*

Benjamin A. Thoele *is currently the Executive Director of the FitWit Foundation in Atlanta, Georgia. He previously worked as a Captain in the Air Force Logistics Management Agency as an operations researcher and Chief, Logistics Analysis.*

Jeremy A. Howe *is currently employed with the Whirlpool Corporation, Corporate Headquarters as the Manager, North American Region Supply Chain Metrics Team. He previously worked as a Captain in the Air Force Logistics Management Agency as Chief, Munitions Analysis.*

Major Anthony F. Antoline *is currently the Chief, Logistics Logistics Transformation Division, Air Force Logistics Management Agency.*

Roger D. Golden *is the Director, Air Force Logistics Management Agency.*